

S.M.P.S

LED Converter

Water Proof Converter

F200WQ2-60C

200W single output with C.V circuit and PFC function



- **Constant voltage design**
- Built-in PFC function
- Built-in OTP function
- OTP-Dim Down(30%@Tc:50~60°C)
- Low THD(Total Harmonic Distortion)
- Protections:Over current /Over voltage /Short circuit
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and street lighting applications
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K61547,K00015
- Metal case
- 3years warranty

IP68   SELV   


ITEM		UPF200S12WQ2-60C	UPF200S24WQ2-60C	UPF200S48WQ2-60C
INPUT	VOLTAGE RANGE	AC160~305V		
	FREQUENCY RANGE	47~63Hz		
	POWER FACTOR	PF>0.95 at rated power		
	THD(max.)	THD<10%(@220VAC & full load)		
	EFFICIENCY(typ.)	88%	91%	91%
	AC CURRENT(typ.)	0.94A/220VAC		
	INRUSH CURRENT(typ.)	40A/230VAC		
	LEAKAGE CURRENT	<2.5mA / 230VAC		
OUTPUT	DC VOLTAGE	12V	24V	48V
	RATED CURRENT	15A(12A@50℃)	7.5A(6A@50℃)	3.75A(3A@50℃)
	RATED POWER	180W(144W@50℃)		
	RECOMMENDED POWER	120W(@35℃)		
	VOLTAGE TOLERANCE	±3%		
	RIPPLE&NOISE(max.) Note2	150mVp-p		
	SETUP,RISE TIME(max.)	3000ms,100ms/230VAC at full load		
	HOLD UP TIME(typ.)	50ms/230VAC at full load		
PROTEC-TION	OVER CURRENT Note3	Over 80% of rating ; recovers automatically after fault condition is removed		
	SHORT CIRCUIT	Hiccup mode ; recovers automatically after fault condition is removed		
	OVER VOLTAGE	110~150% of rating		
	OVER TEMPERATURE	55℃(typ.) : Dim down , 60℃~70℃ : Latch		
ISOLA-TION	WITHSTAND VOLTAGE	I/P-O/P:AC3.75KV, I/P-F.G:AC2KV, O/P-F.G:AC1.5KV		
	ISOLATION RESISTANCE	I/P-O/P, I/P-F.G, O/P-F.G:DC500V 100Mohms(At room temp. & humid.)		
ENVIRON-MENT	WORKING TEMP.&HUMID.	-30~+50℃ (Refer to "DERATING CURVE),20~95%RH		
	STORAGE TEMP.&HUMID.	-40~+80℃,10~95%RH		
	VIBRATION	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes		
OTHERS	DIMENSION/WEIGHT	222*61.5*37.1mm(L*W*H)/0.77Kg		
NOTE	1. All parameters not specially mentioned are measured at 230vac input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHZ of bandwidth by using a 12" twisted pare-wire terminated with 0.1 uF & 47uF parallel capacitor. 3. Refer to "DRIVING METHODS of LED MODULE"			

S.M.P.S


LED Converter

Water Proof Converter


■ BLOCK DIAGRAM

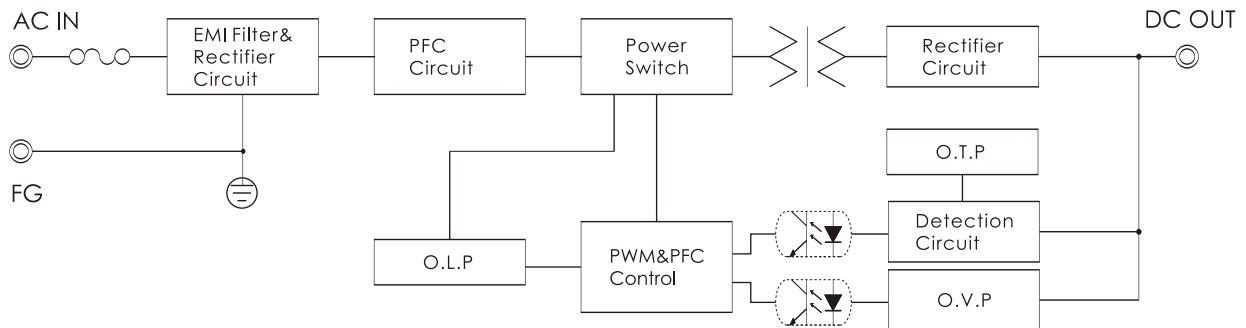

■ DIMENSIONS(unit:mm)

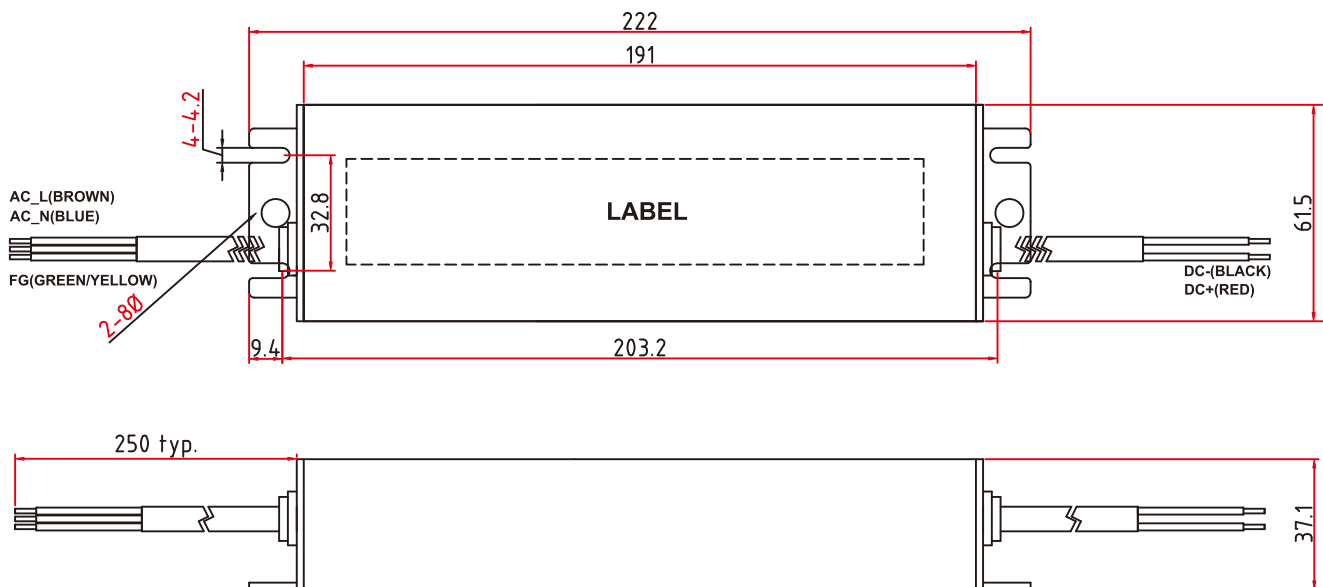

■ DERATING CURVE

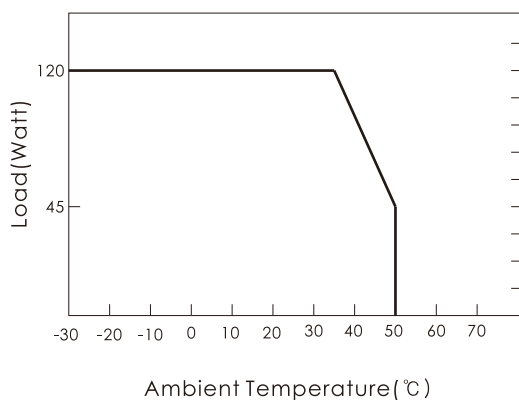

■ STATIC CHARACTERISTICS

